

9097250 TOSHIBA (DISCRETE/OPTO)

56C 07541 DT-33-07

2SC2483

SILICON NPN EPITAXIAL TYPE (PCT PROCESS)


HIGH VOLTAGE GENERAL AMPLIFIER APPLICATIONS.
COLOR TV CLASS B SOUND OUTPUT APPLICATIONS.

FEATURES:

- Large Collector Current and Collector Power Dissipation Capability. ($P_C=2.0W$ at $T_a=25^\circ C$)
- Complementary to 2SA1195

MAXIMUM RATINGS ($T_a=25^\circ C$)

CHARACTERISTIC		SYMBOL	RATING	UNIT
Collector-Base Voltage		V_{CBO}	160	V
Collector-Emitter Voltage		V_{CEO}	160	V
Emitter-Base Voltage		V_{EBO}	6	V
Collector Current		I_C	1.5	A
Base Current		I_B	0.5	A
Collector Power Dissipation	$T_a=25^\circ C$	P_C	2.0	W
	$T_c=25^\circ C$	P_C	15	
Junction Temperature		T_j	150	$^\circ C$
Storage Temperature Range		T_{stg}	-55~150	$^\circ C$

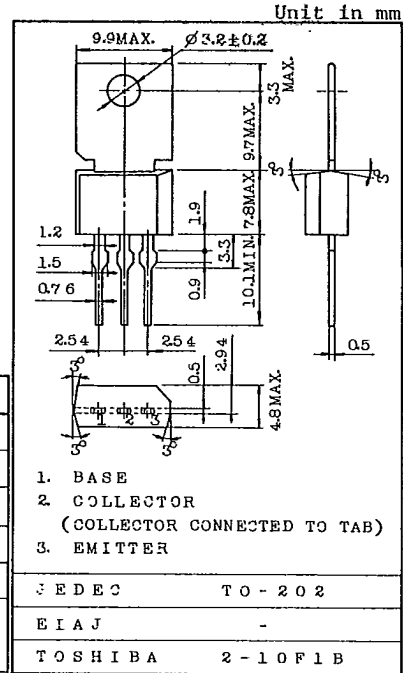







Weight : 1.4g

ELECTRICAL CHARACTERISTICS ($T_a=25^\circ C$)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	I_{CBO}	$V_{CB}=150V, I_E=0$	-	-	1.0	μA
Emitter Cut-off Current	I_{EBO}	$V_{EB}=6V, I_C=0$	-	-	1.0	μA
DC Current Gain	$h_{FE(1)}$ (Note)	$V_{CE}=5V, I_C=200mA$	100	-	320	
	$h_{FE(2)}$	$V_{CE}=5V, I_C=500mA$	40	-	-	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=500mA, I_B=50mA$	-	-	1.0	V
Base-Emitter Voltage	V_{BE}	$V_{CE}=5V, I_C=5mA$	0.50	0.57	0.70	V
Transition Frequency	f_T	$V_{CE}=5V, I_C=200mA$	40	120	-	MHz
Collector Output Capacitance	C_{ob}	$V_{CB}=10V, I_E=0, f=1MHz$	-	-	20	pF

Note : $h_{FE(1)}$ Classification 0 : 100~200, Y : 160~320

TOSHIBA CORPORATION

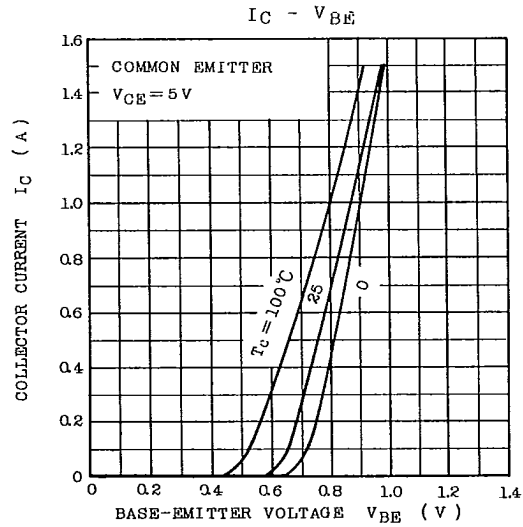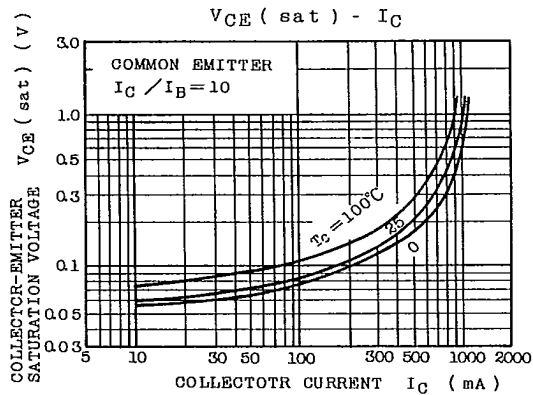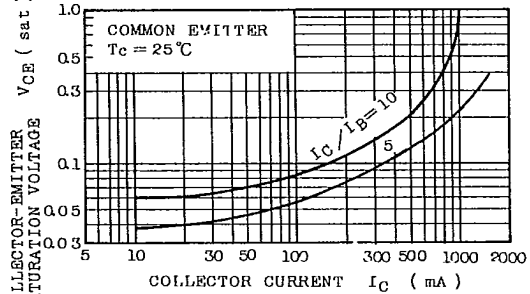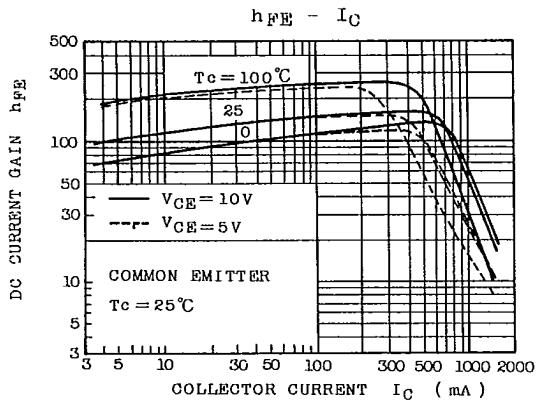
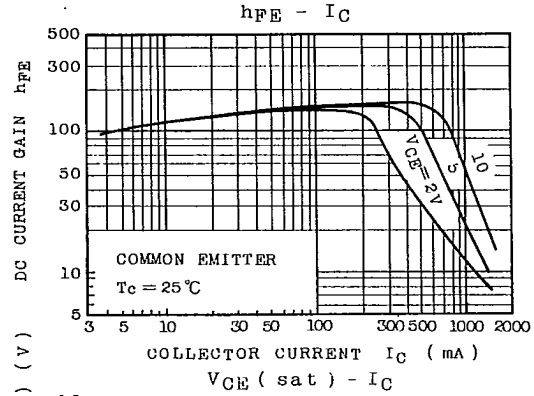
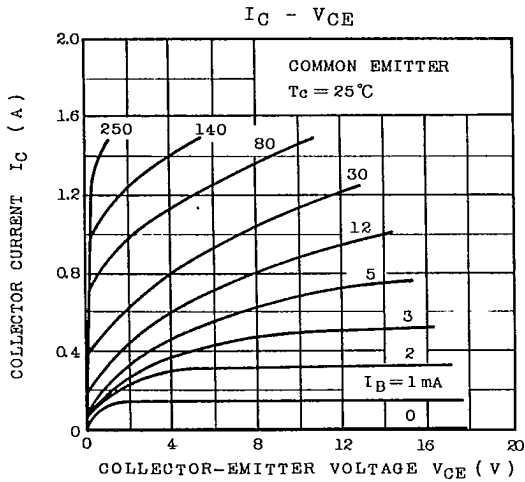


TOSHIBA CORPORATION

9097250 TOSHIBA (DISCRETE/OPTO)

56C 07543 DT-33-07

2SC2483

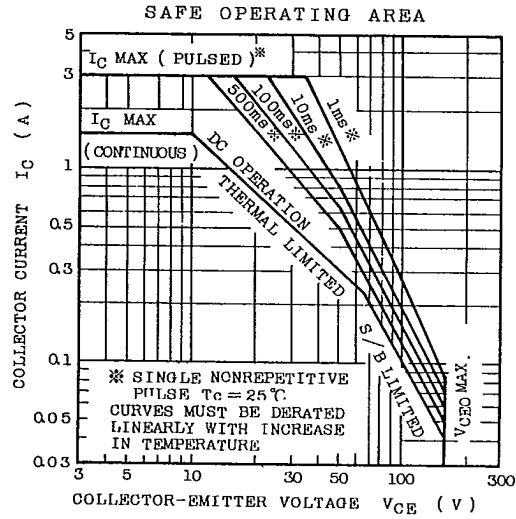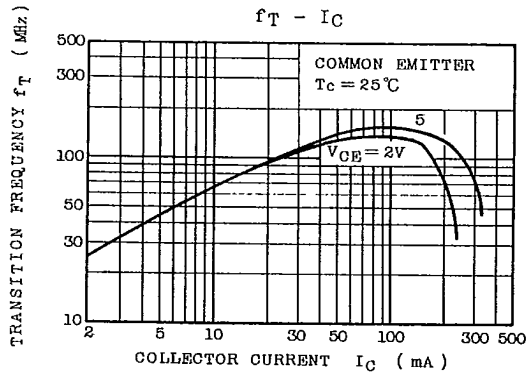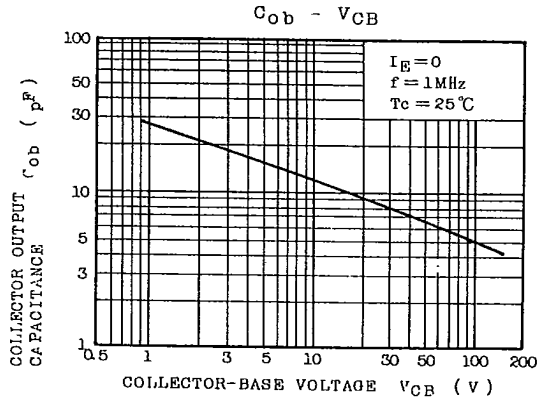

TOSHIBA CORPORATION