

SWITCHMODE SERIES NPN POWER TRANSISTORS

... designed for use in high-voltage, high-speed, power switching in inductive circuit, they are particularly suited for 115 and 220 V switchmode applications such as switching regulator's, inverters, DC -DC conveter, Motor controls, Solenoid / Relay drivers and Deflection circuits.

FEATURES:

*Collector-Emitter Sustaining Voltage-

$$V_{CEO(SUS)} = 400 \text{ V and } 300 \text{ V}$$


* Collector-Emitter Saturation Voltage -

$$V_{CE(sat)} = 1.0 \text{ V (Max.) @ } I_C = 4.0 \text{ A, } I_B = 1.0 \text{ A}$$

* Switching Time - $t_f = 0.9 \text{ us (Max.) @ } I_C = 2.0 \text{ A}$


NPN
MJE13004
MJE13005

4 AMPERE
POWER
TRANSISTORS
300-400 VOLTS
75 WATTS



MAXIMUM RATINGS


Characteristic	Symbol	MJE13004	MJE13005	Unit
Collector-Emitter Voltage	V_{CEO}	300	400	V
Collector-Emitter Voltage	V_{CEV}	600	700	V
Emitter-Base Voltage	V_{EBO}	9.0		V
Collector Current - Continuous	I_C	4.0		A
- Peak	I_{CM}	8.0		
Base current	I_B	2.0		A
Total Power Dissipation @ $T_C = 25^\circ\text{C}$	P_D	75		W
Derate above 25°C		0.6		W/ $^\circ\text{C}$
Operating and Storage Junction Temperature Range	T_J, T_{STG}	-65 to +150		$^\circ\text{C}$



PIN 1.BASE
2.COLLECTOR
3.EMITTER
4.COLLECTOR(CASE)

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance Junction to Case	$R_{\theta jc}$	1.67	$^\circ\text{C/W}$

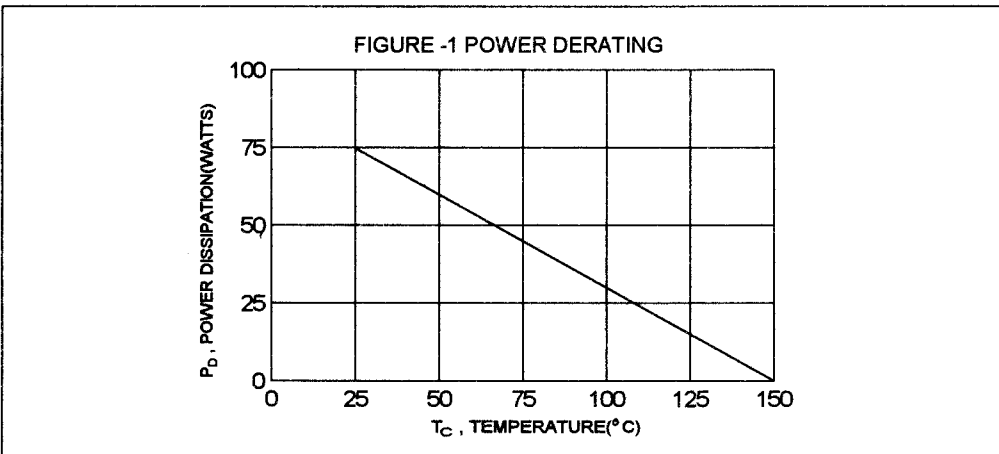

DIM	MILLIMETERS	
	MIN	MAX
A	14.68	15.31
B	9.78	10.42
C	5.01	6.52
D	13.06	14.62
E	3.57	4.07
F	2.42	3.66
G	1.12	1.36
H	0.72	0.96
I	4.22	4.98
J	1.14	1.38
K	2.20	2.97
L	0.33	0.55
M	2.48	2.98
O	3.70	3.90

ELECTRICAL CHARACTERISTICS ($T_c = 25^\circ\text{C}$ unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
----------------	--------	-----	-----	------

OFF CHARACTERISTICS

Collector-Emitter Sustaining Voltage ($I_C = 10\text{ mA}$, $I_B = 0$) MJE13004 MJE13005	$V_{CEO(sus)}$	300 400		V
Collector Cutoff Current ($V_{CEV} = \text{Rated Value}$, $V_{BE(off)} = 1.5\text{ V}$) ($V_{CEV} = \text{Rated Value}$, $V_{BE(off)} = 1.5\text{ V}$, $T_c = 100^\circ\text{C}$)	I_{CEV}		1.0 5.0	mA
Emitter Cutoff Current ($V_{EB} = 9.0\text{ V}$, $I_C = 0$)	I_{EBO}		1.0	mA

ON CHARACTERISTICS (1)

DC Current Gain ($I_C = 1.0\text{ A}$, $V_{CE} = 5.0\text{ V}$) ($I_C = 2.0\text{ A}$, $V_{CE} = 5.0\text{ V}$)	hFE	10 8.0	60 40	
Collector-Emitter Saturation Voltage ($I_C = 1.0\text{ A}$, $I_B = 200\text{ mA}$) ($I_C = 2.0\text{ A}$, $I_B = 500\text{ mA}$) ($I_C = 4.0\text{ A}$, $I_B = 1.0\text{ A}$)	$V_{CE(sat)}$		0.5 0.6 1.0	V
Base-Emitter Saturation Voltage ($I_C = 1.0\text{ A}$, $I_B = 200\text{ mA}$) ($I_C = 2.0\text{ A}$, $I_B = 500\text{ mA}$)	$V_{BE(sat)}$		1.2 1.6	V

DYNAMIC CHARACTERISTICS


Current Gain - Bandwidth Product ($I_C = 500\text{ mA}$, $V_{CE} = 10\text{ V}$, $f = 1.0\text{ MHz}$)	f_T	4.0		MHz
---	-------	-----	--	-----

SWITCHING CHARACTERISTICS


Delay Time	$V_{CC} = 125\text{ V}$, $I_C = 2.0\text{ A}$ $I_{B1} = -I_{B2} = 0.4\text{ A}$, $t_p = 25\text{ us}$, Duty Cycle $\leq 1.0\%$	t_d	0.1	us
Rise Time		t_r	0.7	us
Storage Time		t_s	4.0	us
Fall Time		t_f	0.9	us

(1) Pulse Test: Pulse Width = 300 us, Duty Cycle $\leq 2.0\%$


DC CURRENT GAIN

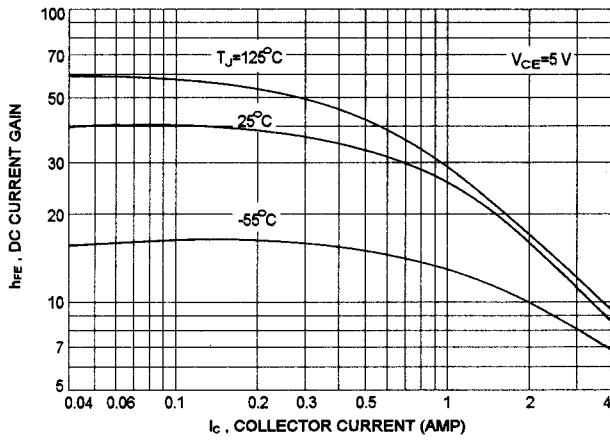


COLLECTOR SATURATION REGION

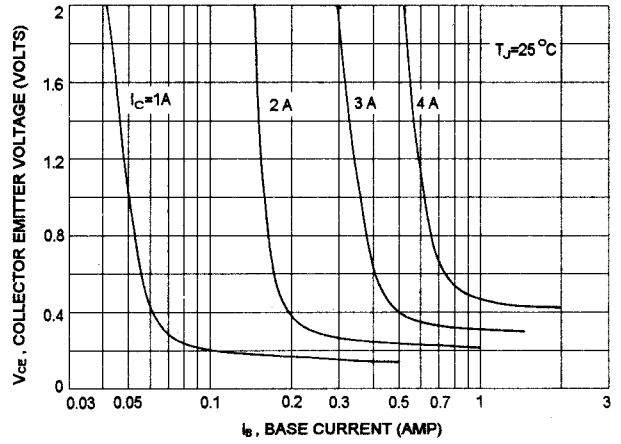


BASE-EMITTER VOLTAGE

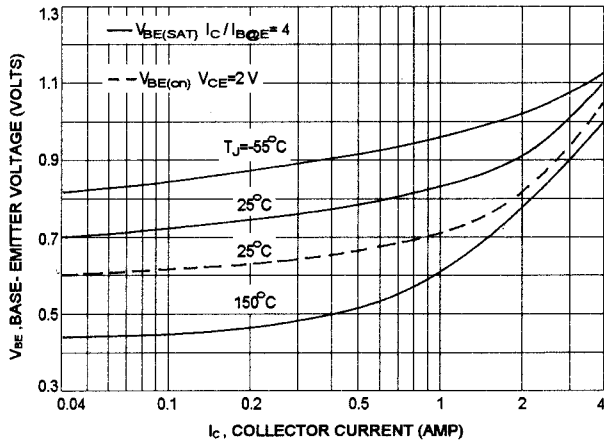


COLLECTOR-EMITTER SATURATION VOLTAGE

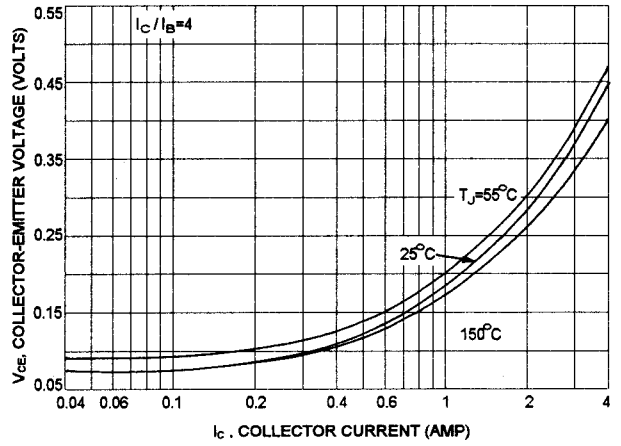


COLLECTOR CUT-OFF REGION

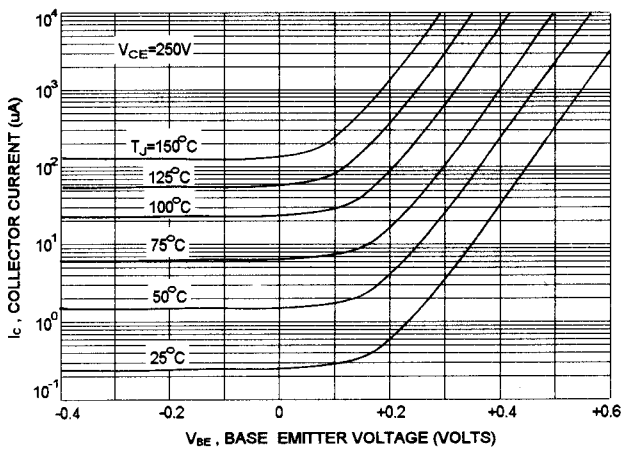


CAPACITANCE

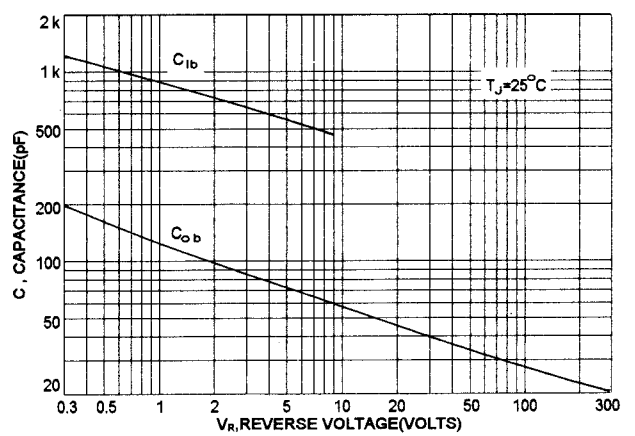


TURN-ON TIME

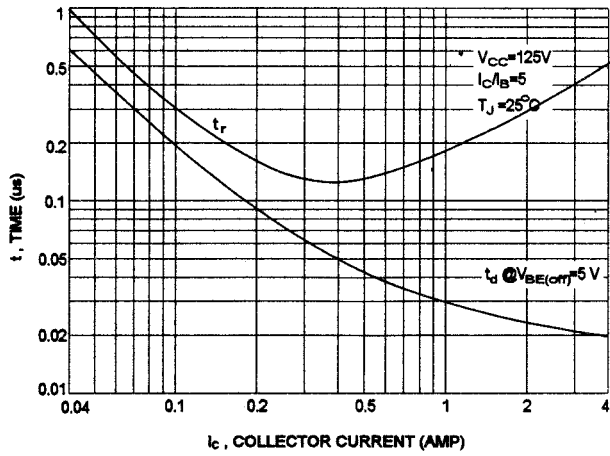


TURN-OFF TIME

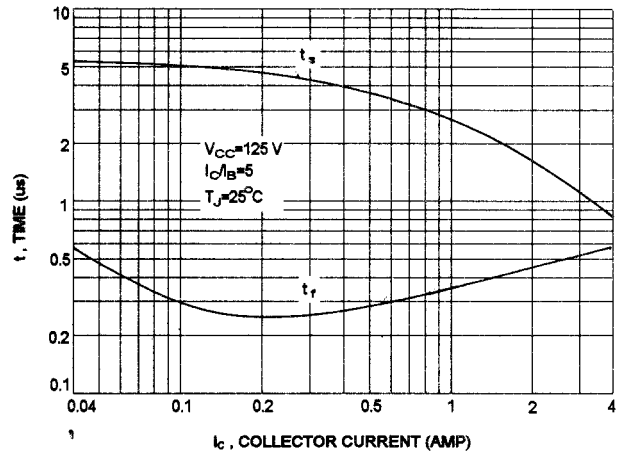

ACTIVE REGION SAFE OPERATING AREA

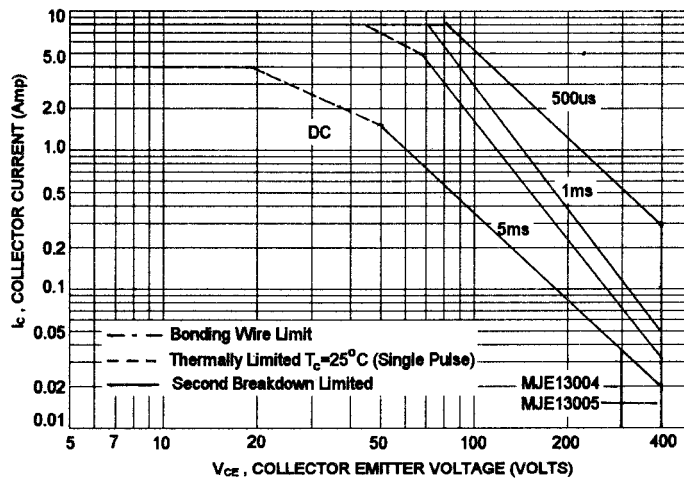

REVERSE BIAS SWITCHING SAFE OPERATING AREA

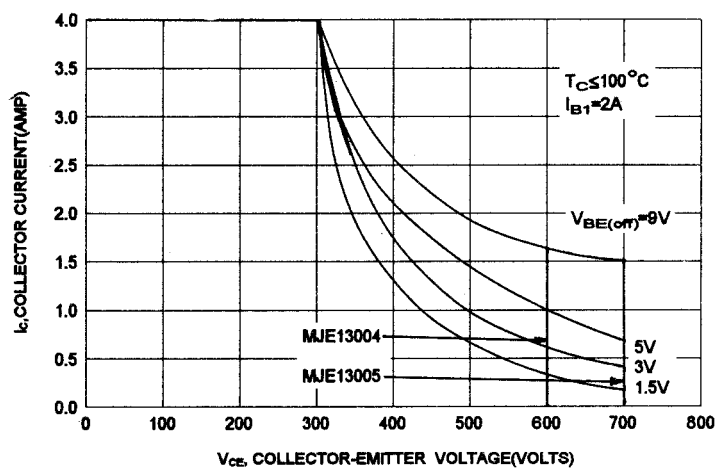

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.